


# TECHNICAL DATA SHEET



<b>TYPE</b>	<b>DUCOSLIDE LUXFRAME 40/40 Perfo</b>
<b>DESCRIPTION</b>	Permanent external solar shading system with sliding shutters
<b>TYPE OF BLADE</b>	Perforated plate
<b>MATERIAL</b>	Aluminium
<b>HOLE PATTERN</b>	Ø 10 x 25 mm
<b>FRAMETYPE (WxH)</b>	40mm x 40mm
<b>MAX. SLIDE WIDTH (800 Pa)</b>	A = 1250mm ↔ B = 2300mm   only with 2 reinforcement profiles
<b>MAX. SLIDE HEIGHT (800 Pa)</b>	A = 500mm ↔ B = 3500mm
<b>MATERIAL FRAME</b>	Aluminium : EN AW-6063 T66
<b>SURFACE TREATMENT</b>	Frame: standard natural anodized (15- 20µm) Perforated plate and frame: Polyester powdercoated (60-80µm)
<b>REACTION TO FIRE</b>	A2-s1,d0 (EN13501-1: 2018)
<b>COLOURS</b>	All RAL colours

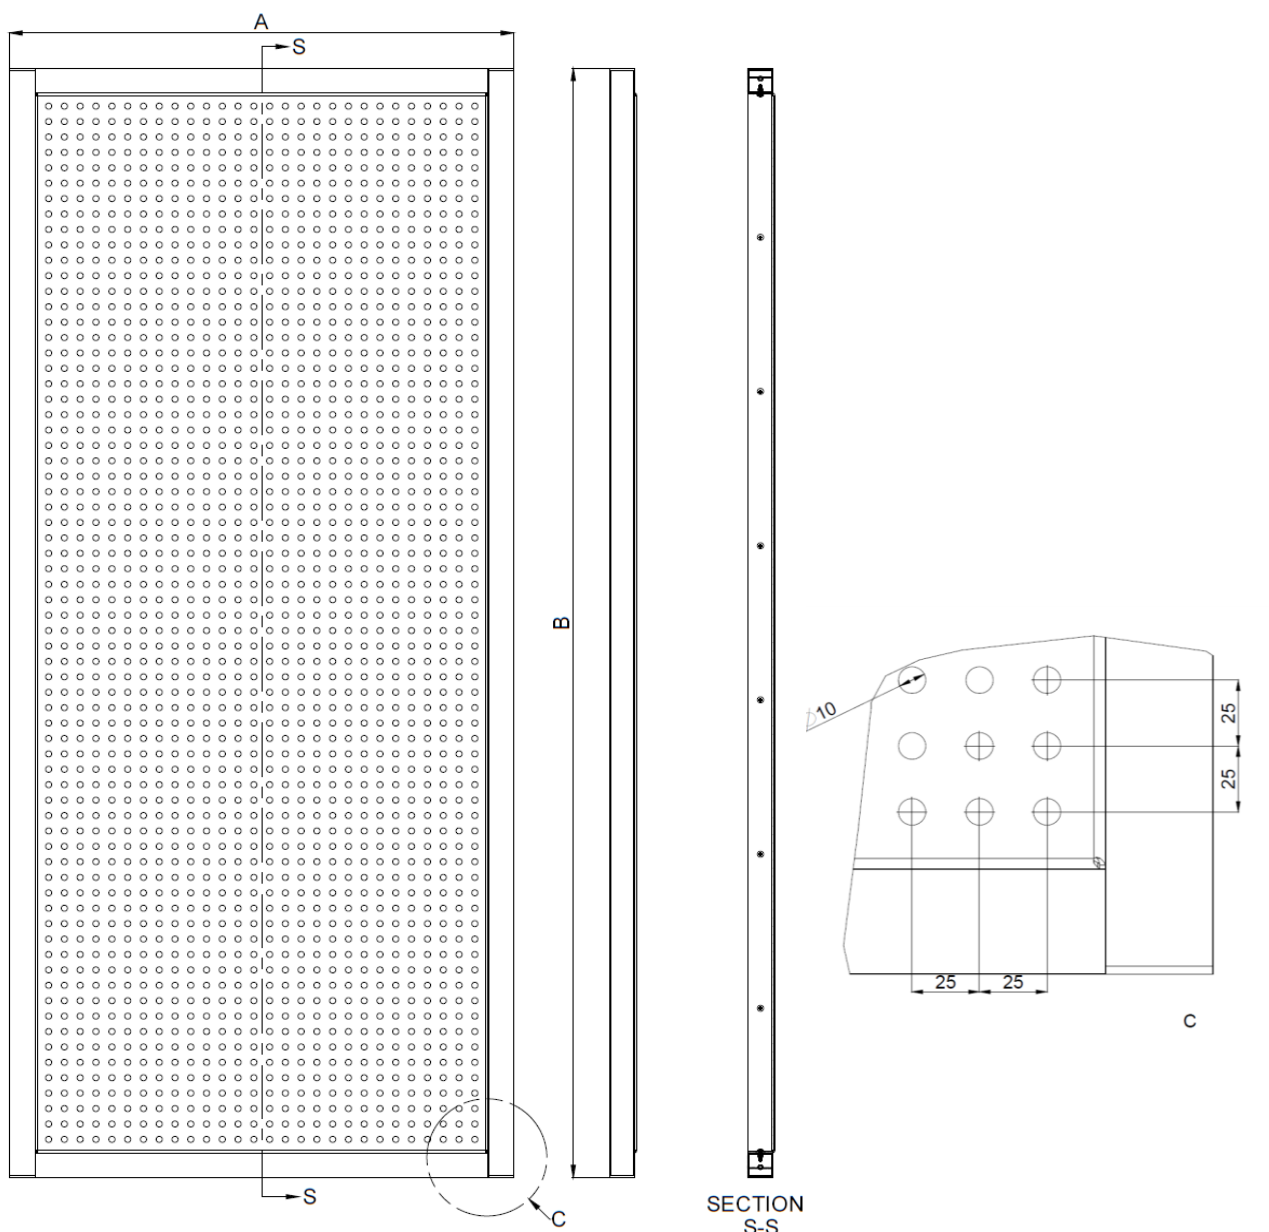

**B: Frame height**  
**A: Frame width**