



TECHNICAL DATA SHEET

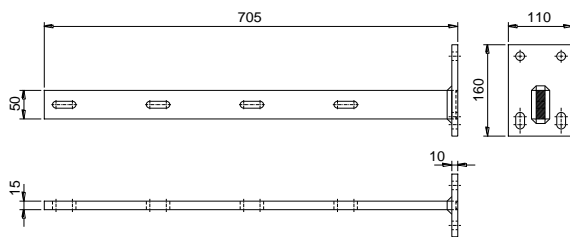

Ventilation & Sun Control

TYPE	DUCOSUN 150 D OVERSLUNG ▪ Mullion 30-78
DESCRIPTION	External permanent solar shading system
TYPE OF BLADE	150 D Material: •Al Mg Si 0,5 Finish: •Standard natural anodised (15-20µm) •Polyester powder coated (60-80µm) - All RAL-colours
BLADE ANGLE	45°
MAX SPAN	To calculate, example for 800Pa in the table below
PROJECTION	To calculate, example for 800Pa in the table below
SHIFT DISTANCE	Min 0mm , Max 300 mm , per millimeter
FIXATION	Wall bracket against underlying structure Material: •Steel S355 Finish: •Blasted with grit (GH40) & metallised with zinc-aluminium alloy (±40µm) •Polyester powder coated (60-80µm) - All RAL-colours
MULLION	30/78 Material: •Al Mg Si 0,5 Finish: •Standard natural anodised (15-20µm) •Polyester powder coated (60-80µm) - All RAL-colours
OTHER PARTS	Clips : Polyamide PA 6,6 - Fibreglass reinforced (Black/Grey) Bolts/Nuts/... : SS AISI 304
OPTIONS	Facia : not possible Strut : possible

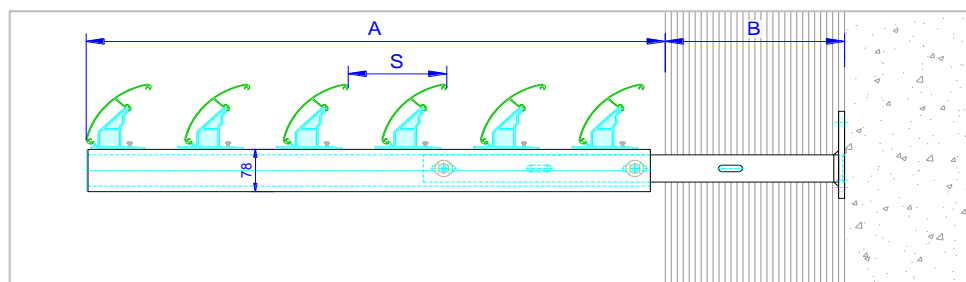

	800Pa ; B=0 ; S=165		800Pa ; B=300 ; S=165	
A	Max. C.C	# Blades	Max. C.C	# Blades
948	2643	6	1887	6
1113	2166	7	1479	7
1278	1684	8	1191	8
1443	1346	9	980	9
1608	1100	10	-	-
1773	915	11	-	-