



TECHNICAL DATA SHEET

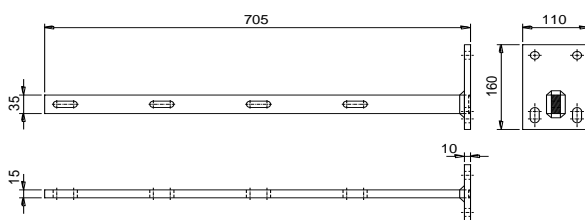

Ventilation & Sun Control

TYPE	DUCOSUN 150 D UNDERSLUNG ▪ Mullion 30-50B
DESCRIPTION	External permanent solar shading system
TYPE OF BLADE	150 D Material: •Al Mg Si 0,5 Finish: •Standard natural anodised (15-20µm) •Polyester powder coated (60-80µm) - All RAL-colours
BLADE ANGLE	60°
MAX SPAN	To calculate, example for 800Pa in the table below
PROJECTION	To calculate, example for 800Pa in the table below
SHIFT DISTANCE	Min 0mm , Max 300 mm , per millimeter
FIXATION	Wall bracket against underlying structure Material: •Steel S355 Finish: •Blasted with grit (GH40) & metallised with zinc-aluminium alloy (±40µm) •Polyester powder coated (60-80µm) - All RAL-colours
MULLION	30/50B Material: •Al Mg Si 0,5 Finish: •Standard natural anodised (15-20µm) •Polyester powder coated (60-80µm) - All RAL-colours
OTHER PARTS	Clips : Polyamide PA 6,6 - fibreglass reinforced (Black/Grey) Bolts/Nuts/... : SS AISI 304
OPTIONS	Facia : not possible Strut : not possible

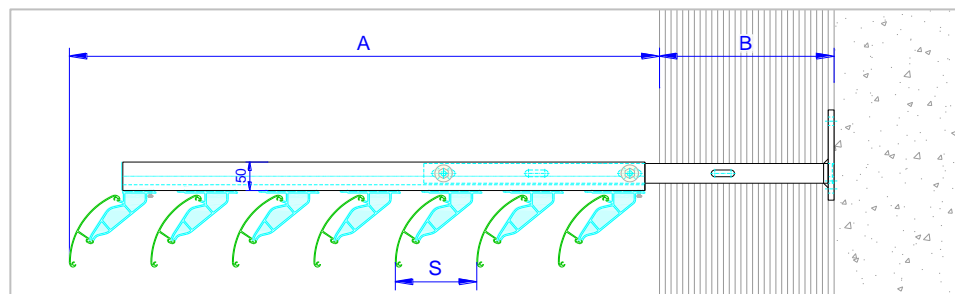

	800Pa ; B=0 ; S=140		800Pa ; B=300 ; S=140	
A	Max C.C.	# Blades	Max C.C.	# Blades
1003	1565	7	1042	7
1143	1230	8	848	8
1283	992	9	-	-