

TECHNICAL DATA SHEET



Type	DucoGrille Solid F 30Z/28-P2 + options	
DESCRIPTION	Louvre with equal leg frame applicable in Alu, PVC or timber windows	
SHAPE OF BLADE	30Z punched blades (P2) height 21mm x width 18mm	
PITCH	37,5 mm	
FRAME WIDTH	40 mm	
GLASS THICKNESS	28 mm	
FRAME DEPTH	42 mm	
MIN. DIMENSIONS	Width 200mm, Height 200mm. Exception on request.	
REACTION TO FIRE	A2-s1,d0 (EN13501-1)	
MESH	Aluminium extrusions are perforated and act as bird mesh - standard with insect mesh 2.3 x 2.3 mm	
OPTIONS	incl. extra drip tray on the back of the frame test result situation installed in wall	
MATERIAL	Aluminium : EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5mm	
SURFACE TREATMENT	- standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request	
VISUAL FREE AREA	86% per meter of punching	
PHYSICAL FREE AREA	48%	
AIR FLOW DATA	(EN13030)	+ options
	Ce	0,232
	K-factor intake	18,58
	Cd	0,266
	K-factor exhaust	14,13
WATER RESISTANCE	(EN13030)	+ options
	v = 0 m/s	B
	v = 0,5 m/s	B
	v = 1 m/s	B
	v = 1.5 m/s	B
	v = 2 m/s	C
	v = 2.5 m/s	D
	v = 3 m/s	D
v = 3,5 m/s	D	
FALL-TROUGH PROTECTION	BS6180	Class XI

3

2

1

D

D

C


C

B

B

A

A

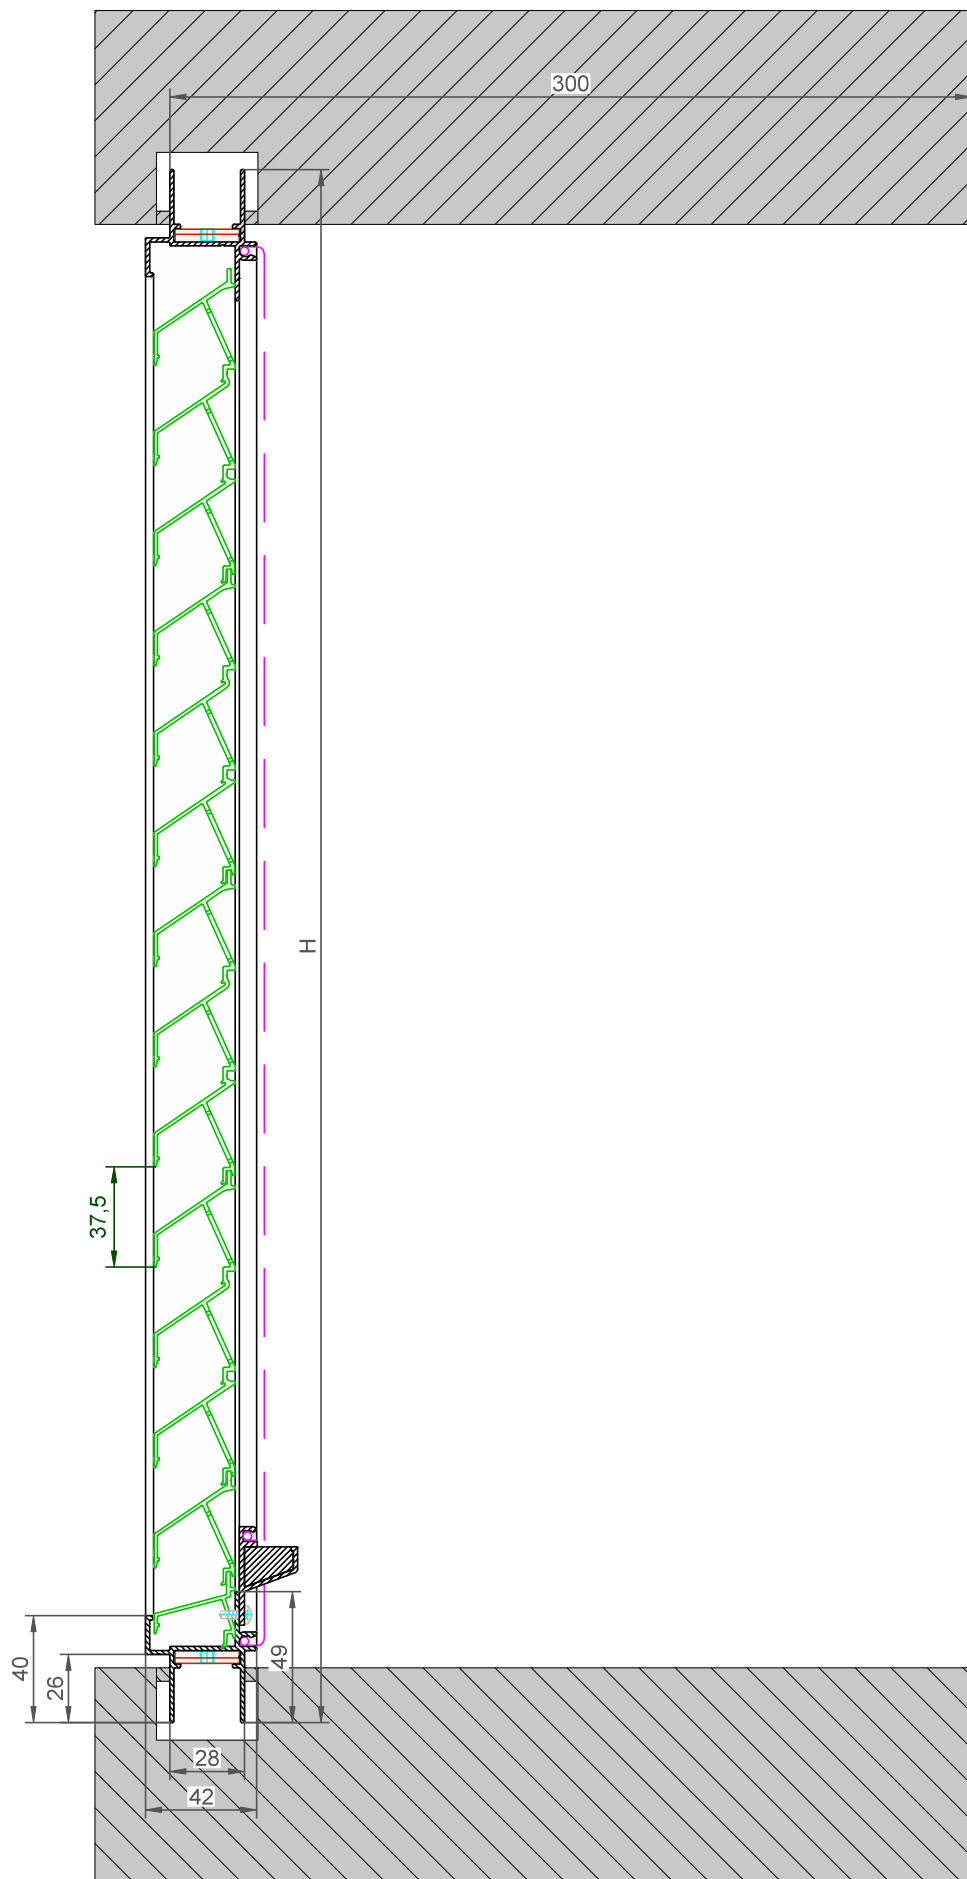

DucoGrille Solid **F30Z/28 - P2 + Options**

Datum : 23/03/2023

Schaal : 1:2

DUCO
Ventilation & Sun Control

Bedrijvenlaan 2 - 8630 VEURNE
tel. 0032-58/330066 - fax.0032-58/330067
email: info@duco.eu www.duco.eu

Deze tekening is eigendom van Duco Projects en mag niet gekopieerd
noch getoond worden aan derden zonder schriftelijke toestemming

Tol. : ISO 2768-mK

Getekend : SDN/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

mm

kg/m

dm²/m

DGS-F30Z-28-P2 + Options

3

2

1