

TECHNICAL DATA SHEET



Type	DucoWall Solid W30Z NP	
DESCRIPTION	Continuous louvre wall	
SHAPE OF BLADE	30Z NP	
PITCH	37,5 mm	
BLADE HEIGHT	33 mm	
BLADE DEPTH	31 mm	
INSTALLATION DEPTH	with mullion 40/21 (double) 52 mm with mullion 40/70 double 102 mm with mullion 40/100 double 132 mm	
MAX. BLADE LENGTH	6000 mm	
MAX. SPAN	1890 mm @ 800Pa	
STARTING DIMENSION	12 mm	
REACTION TO FIRE	A2-s1,d0 (EN13501-1)	
MESH	0%	
MATERIAL	Aluminium : EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5mm Thermoplastic parts : Clips Polyamide PA 6,6 -reinforced with glass fibre	
SURFACE TREATMENT	- standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request	
VISUAL FREE AREA	0%	
PHYSICAL FREE AREA	0%	

3

2

1

D

D

C



C

B

B

A

A

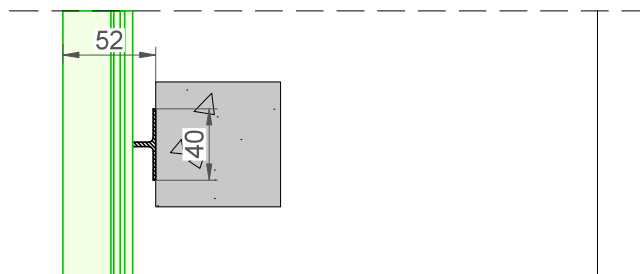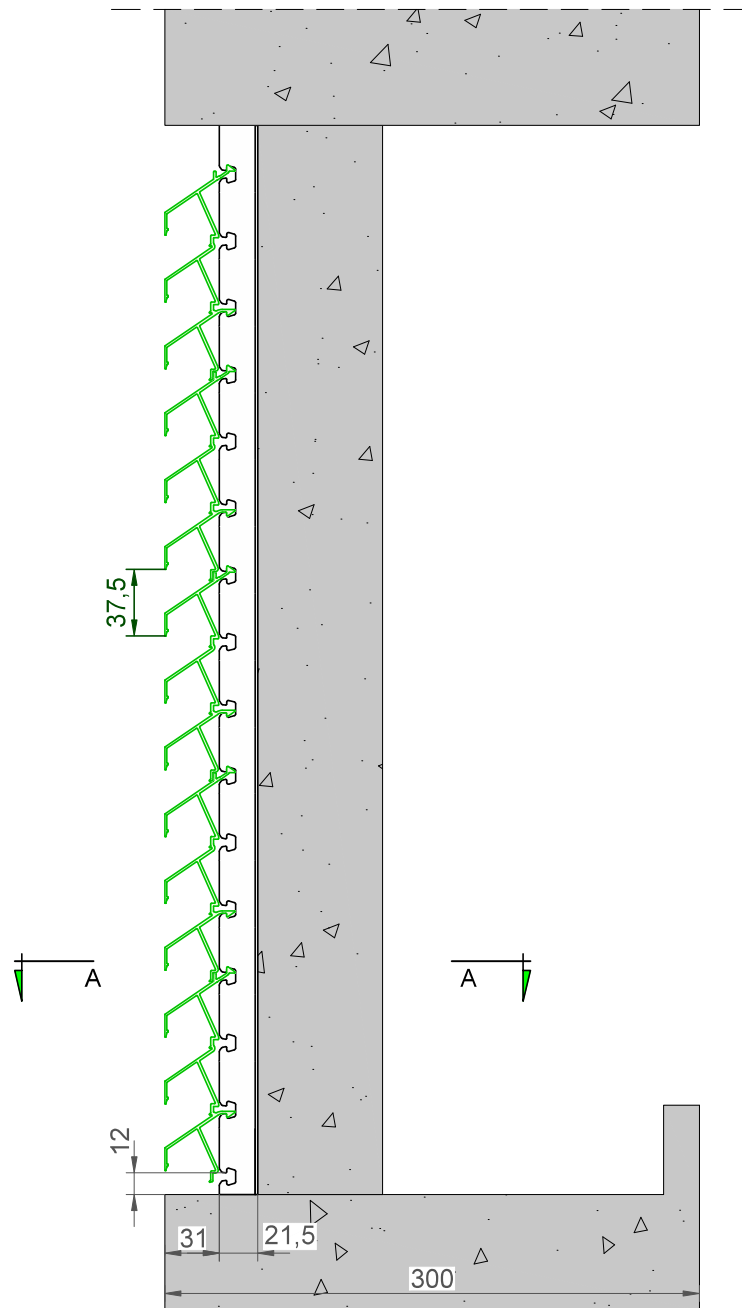

DucoWall Solid **30Z NP** Draagprofiel 40/21

Datum : 24/05/2022

Schaal : 1:3

DUCO
Ventilation & Sun Control

Tol. : ISO 2768-mK

Getekend : LNT/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

Bedrijvenlaan 2 - 8630 VEURNE
tel. 0032-58/330066 - fax.0032-58/330067
email: info@duco.eu www.duco.eu
Deze tekening is eigendom van Duco Projects en mag niet gekopieerd
noch getoond worden aan derden zonder schriftelijke toestemming

DWSolid-30Z NP DP 40/21

Zonder dorpel, geen toplamel beschikbaar

3

2

1