





TECHNICAL DATA SHEET

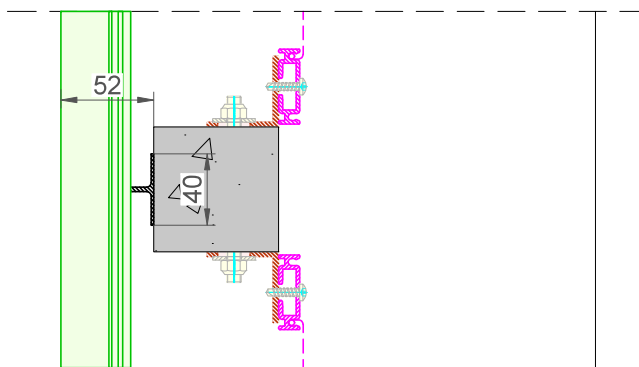

Type	DucoWall Solid W30Z P2 + Options																			
DESCRIPTION	Continuous louvre wall																			
SHAPE OF BLADE	30Z with punching (P2) H 21mm x W 18mm																			
PITCH	37,5 mm																			
BLADE HEIGHT	33 mm																			
BLADE DEPTH	31 mm																			
INSTALLATION DEPTH	with mullion 40/21 (double) 52 mm with mullion 40/70 double 102 mm with mullion 40/100 double 132 mm																			
MAX. BLADE LENGTH	6000 mm																			
MAX. SPAN	2065 mm @ 800Pa																			
STARTING DIMENSION	12 mm																			
REACTION TO FIRE	A2-s1,d0 (EN13501-1)																			
OPTIONS	Aluminium extrusions are perforated and act as bird mesh Insect mesh frame 2,3 x 2,3mm included																			
MATERIAL	Aluminium : EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5mm																			
SURFACE TREATMENT	- standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request																			
VISUAL FREE AREA	86%																			
PHYSICAL FREE AREA	48%																			
AIR FLOW DATA	<table border="1"> <thead> <tr> <th>(EN13030)</th> <th>standard</th> </tr> </thead> <tbody> <tr> <td>Ce</td> <td>0,232</td> </tr> <tr> <td>K-factor intake</td> <td>18,58</td> </tr> <tr> <td>Cd</td> <td>0,266</td> </tr> <tr> <td>K-factor exhaust</td> <td>14,13</td> </tr> </tbody> </table>		(EN13030)	standard	Ce	0,232	K-factor intake	18,58	Cd	0,266	K-factor exhaust	14,13								
(EN13030)	standard																			
Ce	0,232																			
K-factor intake	18,58																			
Cd	0,266																			
K-factor exhaust	14,13																			
WATER RESISTANCE	<table border="1"> <thead> <tr> <th>(EN13030)</th> <th>standard</th> </tr> </thead> <tbody> <tr> <td>v = 0 m/s</td> <td>B</td> </tr> <tr> <td>v = 0,5 m/s</td> <td>B</td> </tr> <tr> <td>v = 1 m/s</td> <td>B</td> </tr> <tr> <td>v = 1.5 m/s</td> <td>B</td> </tr> <tr> <td>v = 2 m/s</td> <td>C</td> </tr> <tr> <td>v = 2.5 m/s</td> <td>D</td> </tr> <tr> <td>v = 3 m/s</td> <td>D</td> </tr> <tr> <td>v = 3,5 m/s</td> <td>D</td> </tr> </tbody> </table>		(EN13030)	standard	v = 0 m/s	B	v = 0,5 m/s	B	v = 1 m/s	B	v = 1.5 m/s	B	v = 2 m/s	C	v = 2.5 m/s	D	v = 3 m/s	D	v = 3,5 m/s	D
(EN13030)	standard																			
v = 0 m/s	B																			
v = 0,5 m/s	B																			
v = 1 m/s	B																			
v = 1.5 m/s	B																			
v = 2 m/s	C																			
v = 2.5 m/s	D																			
v = 3 m/s	D																			
v = 3,5 m/s	D																			

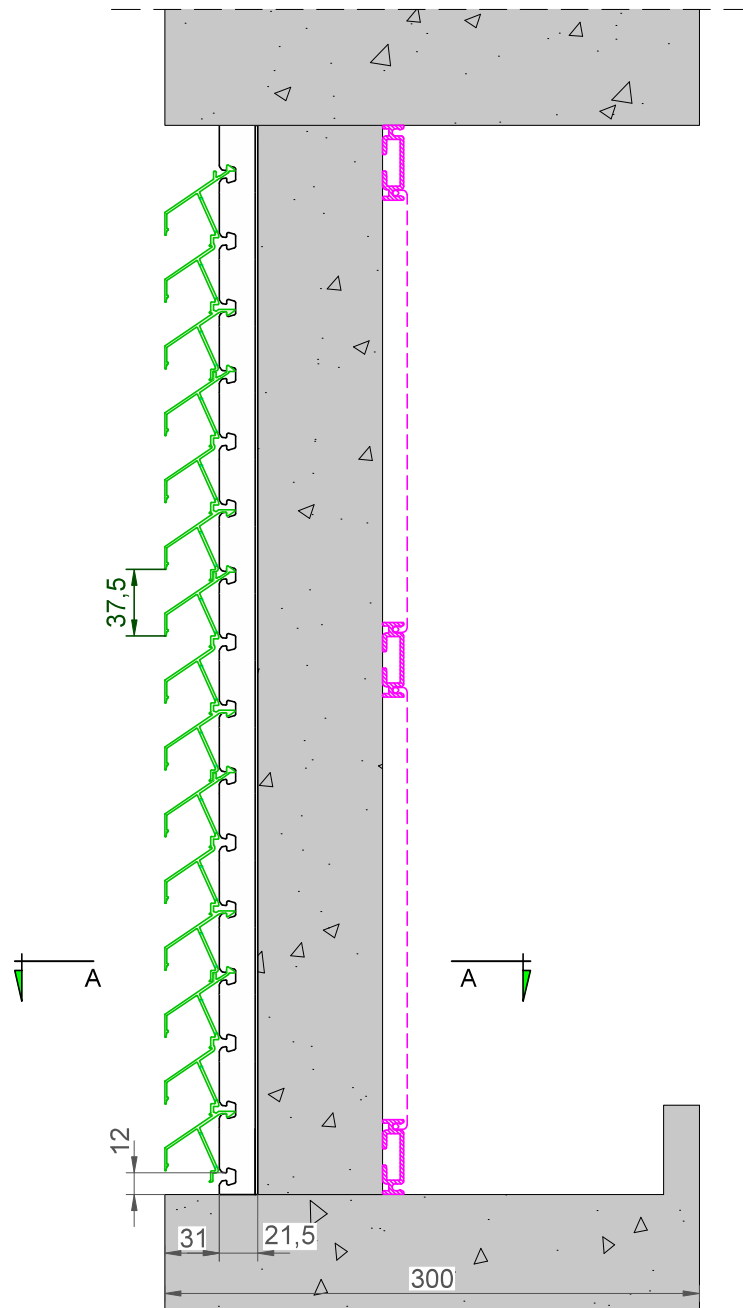

Zonder dorpel, geen toplamel beschikbaar

DucoWall Solid 30Z P2 + Options Draagprofiel 40/21			Datum : 03/06/2022	
			Schaal : 1:3	
 Ventilation & Sun Control <small>Bedrijvenlaan 2 - 8630 VEURNE tel. 0032-58/330066 - fax.0032-58/330067 email: info@duco.eu www.duco.eu</small>			Getekend : LNT/JHX	
			Ref nr. :	
Formaat : A3			Tekening nr. : DWSolid-30Z P2 DP 40/21 + Options	
omtrek	gewicht			
mm	kg/m	dm²/m		