

TECHNICAL DATA SHEET



Type	DucoGrille Solid G 30Z-P2 + options	
DESCRIPTION	Louvre "build-in" wall grille	
SHAPE OF BLADE	30Z punched blades (P2) height 21mm x width 18mm	
PITCH	37,5 mm	
FRAME WIDTH	34 mm	
EQUAL LEG OUTER FRAME	18 mm	
FRAME DEPTH	38 mm	
MIN. DIMENSIONS	Width 200mm, Height 200mm. Exception on request.	
REACTION TO FIRE	A2-s1,d0 (EN13501-1)	
MESH	Aluminium extrusions are perforated and act as bird mesh - standard with insectmesh 2.3 x 2.3 mm	
OPTIONS	incl. extra drip tray on the back of the frame test result situation installed in wall	
MATERIAL	Aluminium : EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5mm	
SURFACE TREATMENT	- standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request	
VISUAL FREE AREA	86% per meter of punching	
PHYSICAL FREE AREA	48%	
AIR FLOW DATA	(EN13030)	+ options
	Ce	0,232
	K-factor intake	18,58
	Cd	0,266
	K-factor exhaust	14,13
WATER RESISTANCE	(EN13030)	+ options
	v = 0 m/s	B
	v = 0,5 m/s	B
	v = 1 m/s	B
	v = 1.5 m/s	B
	v = 2 m/s	C
	v = 2.5 m/s	D
	v = 3 m/s	D
v = 3,5 m/s	D	
FALL-TROUGH PROTECTION	BS6180	Class X

3

2

1

D

D

C

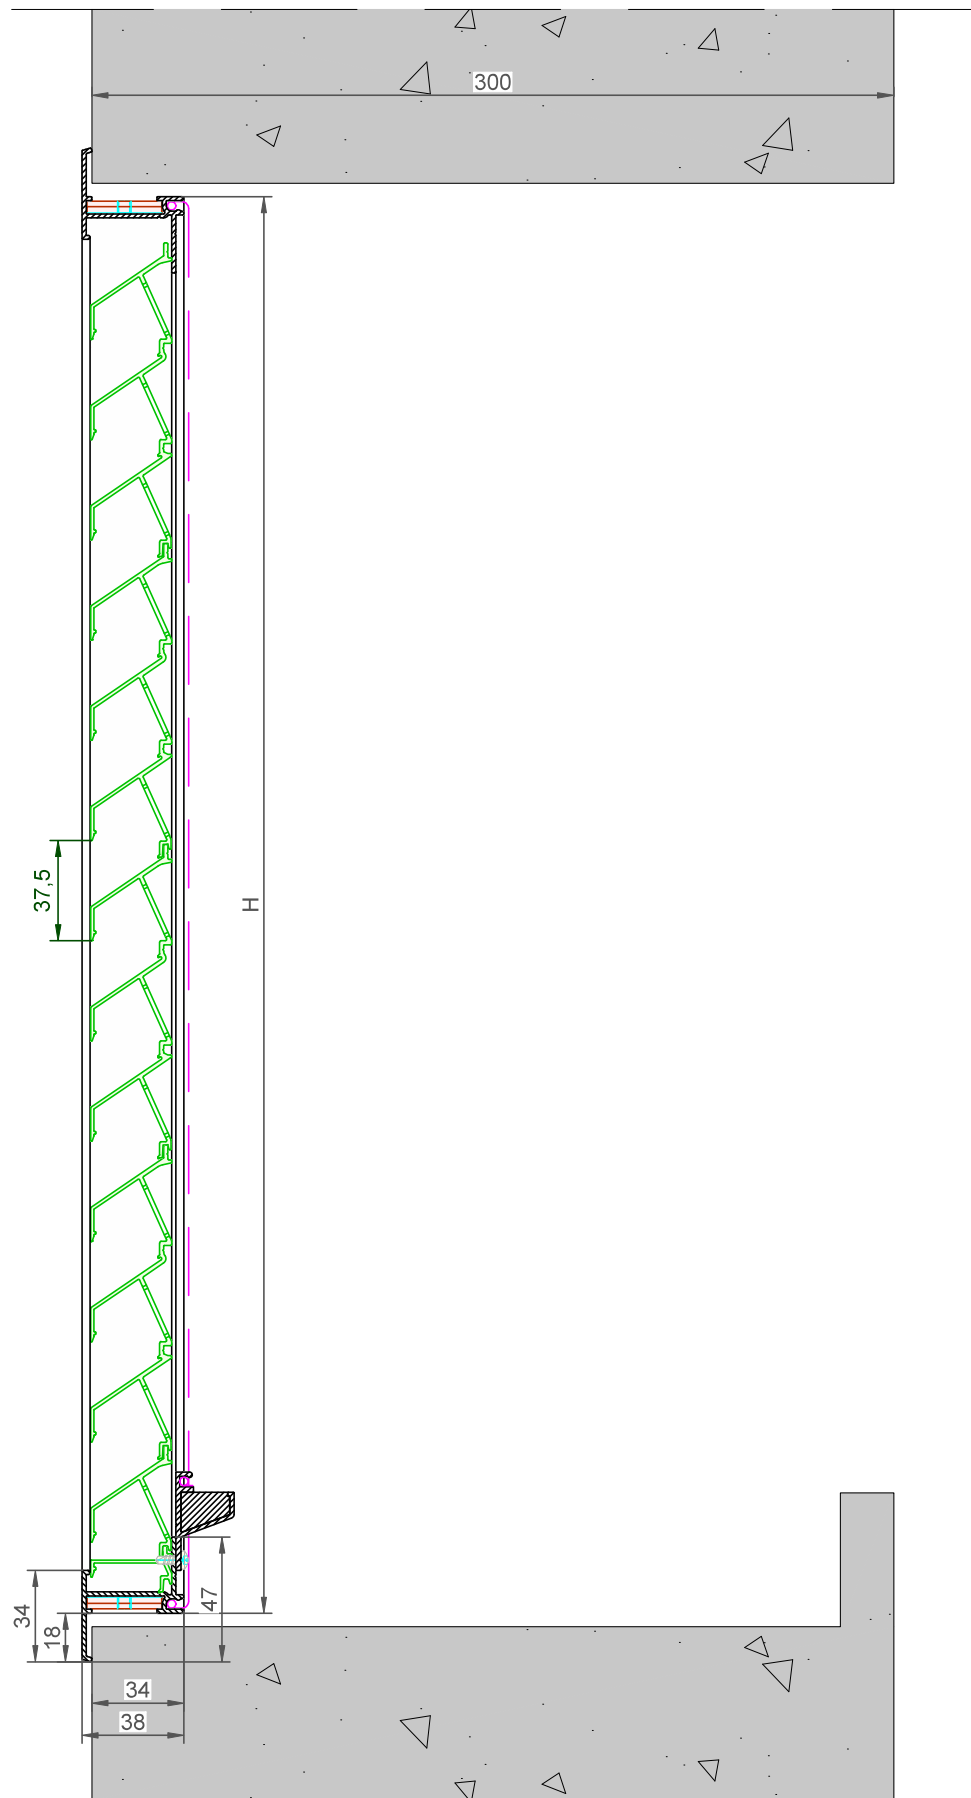
C

B

B

A

A

DucoGrille Solid **G30Z - P2 + Options**

Datum : 19/09/2022

Schaal : 1:2

DUCO
Ventilation & Sun Control

Bedrijvenlaan 2 - 8630 VEURNE
tel. 0032-58/330066 - fax.0032-58/330067
email: info@duco.eu www.duco.eu
Deze tekening is eigendom van Duco Projects en mag niet gekopieerd
noch getoond worden aan derden zonder schriftelijke toestemming

Tol. : ISO 2768-mK

Getekend : SDN/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

mm

kg/m

dm²/m

DGS-G30Z-P2 + Options

3

2

1