

TECHNICAL DATA SHEET



Type	DucoGrille Classic F 20V																			
DESCRIPTION	Window louvre, applicable in aluminium, PVC or timber windows.																			
SHAPE OF BLADE	20V																			
PITCH	20 mm																			
FRAME WIDTH	26 mm																			
GLASS THICKNESS	24 mm																			
FRAME DEPTH	35 mm																			
MIN. DIMENSIONS	Width 200mm, Height 200mm. Exception on request.																			
MESH	<ul style="list-style-type: none"> - standard with insectmesh 2.3 x 2.3 mm - optional without mesh - optional with bird mesh 6 x 6 mm - optional with bird mesh 20 x 20 mm 																			
DRIP TRAY PROFILE	not applicable																			
MATERIAL	Aluminium : EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5mm Thermoplastic parts : Clips Polyamide PA 6,6 -reinforced with glass fibre																			
SURFACE TREATMENT	<ul style="list-style-type: none"> - standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request 																			
VISUAL FREE AREA	95%																			
PHYSICAL FREE AREA	34%																			
AIR FLOW DATA	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="background-color: #eee;">(EN13030)</th> <th style="background-color: #eee;">standard</th> </tr> </thead> <tbody> <tr> <td>Ce</td> <td>0,155</td> </tr> <tr> <td>K-factor intake</td> <td>41,62</td> </tr> <tr> <td>Cd</td> <td>0,155</td> </tr> <tr> <td>K-factor exhaust</td> <td>41,62</td> </tr> </tbody> </table>		(EN13030)	standard	Ce	0,155	K-factor intake	41,62	Cd	0,155	K-factor exhaust	41,62								
(EN13030)	standard																			
Ce	0,155																			
K-factor intake	41,62																			
Cd	0,155																			
K-factor exhaust	41,62																			
WATER RESISTANCE	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="background-color: #eee;">(EN13030)</th> <th style="background-color: #eee;">standard</th> </tr> </thead> <tbody> <tr> <td>v = 0 m/s</td> <td>A</td> </tr> <tr> <td>v = 0,5 m/s</td> <td>B</td> </tr> <tr> <td>v = 1 m/s</td> <td>C</td> </tr> <tr> <td>v = 1.5 m/s</td> <td>D</td> </tr> <tr> <td>v = 2 m/s</td> <td>D</td> </tr> <tr> <td>v = 2.5 m/s</td> <td>D</td> </tr> <tr> <td>v = 3 m/s</td> <td>D</td> </tr> <tr> <td>v = 3,5 m/s</td> <td>D</td> </tr> </tbody> </table>		(EN13030)	standard	v = 0 m/s	A	v = 0,5 m/s	B	v = 1 m/s	C	v = 1.5 m/s	D	v = 2 m/s	D	v = 2.5 m/s	D	v = 3 m/s	D	v = 3,5 m/s	D
(EN13030)	standard																			
v = 0 m/s	A																			
v = 0,5 m/s	B																			
v = 1 m/s	C																			
v = 1.5 m/s	D																			
v = 2 m/s	D																			
v = 2.5 m/s	D																			
v = 3 m/s	D																			
v = 3,5 m/s	D																			

3

2

1

D

D

C

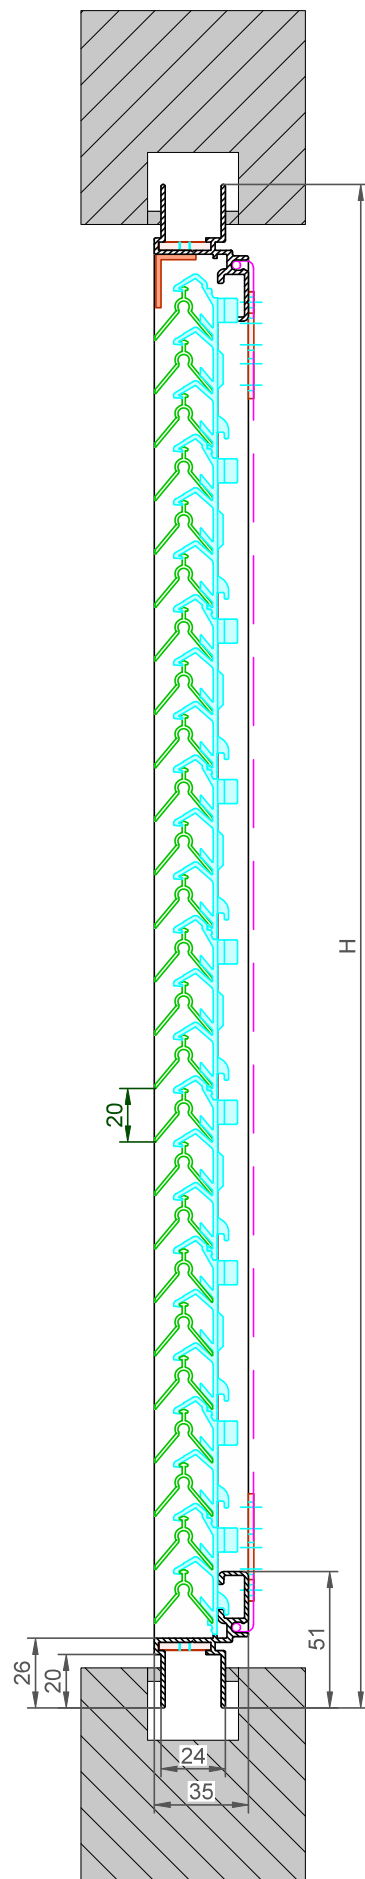
C

B

B

A

A

DucoGrille Classic **F20V**

Datum : 14/02/2023

Schaal : 1:2

DUCO
Ventilation & Sun Control

Bedrijvenlaan 2 - 8630 VEURNE
tel. 0032-58/330066 - fax.0032-58/330067
email: info@duco.eu www.duco.eu
Deze tekening is eigendom van Duco Projects en mag niet gekopieerd
noch getoond worden aan derden zonder schriftelijke toestemming

Tol. : ISO 2768-mK

Getekend : SDN/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

mm

kg/m

dm²/m**DGC-F20V**

3

2

1