

TECHNICAL DATA SHEET



Type	DucoGrille Solid F 30Z/32-P1 + options	
DESCRIPTION	Louvre with equal leg frame applicable in Alu, PVC or timber windows	
SHAPE OF BLADE	30Z punched blades (P1) height 21mm x width 2,5mm	
PITCH	37,5 mm	
FRAME WIDTH	40 mm	
GLASS THICKNESS	32 mm	
FRAME DEPTH	41 mm	
MIN. DIMENSIONS	Width 200mm, Height 200mm. Exception on request.	
REACTION TO FIRE	A2-s1,d0 (EN13501-1)	
MESH	Aluminiumextrusions are perforated and act as insect mesh	
OPTIONS	incl. extra drip tray on the back of the frame test result situation installed in wall	
MATERIAL	Aluminium : EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5mm	
SURFACE TREATMENT	<ul style="list-style-type: none"> - standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request 	
VISUAL FREE AREA	60% per meter of punching	
PHYSICAL FREE AREA	34%	
AIR FLOW DATA	(EN13030)	+ options
	Ce	0,216
	K-factor intake	21,43
	Cd	0,242
	K-factor exhaust	17,08
WATER RESISTANCE	(EN13030)	+ options
	v = 0 m/s	B
	v = 0,5 m/s	B
	v = 1 m/s	C
	v = 1.5 m/s	C
	v = 2 m/s	D
	v = 2.5 m/s	D
	v = 3 m/s	D
v = 3,5 m/s	D	
FALL-TROUGH PROTECTION	BS6180	Class XI

3

2

1

D

D

C

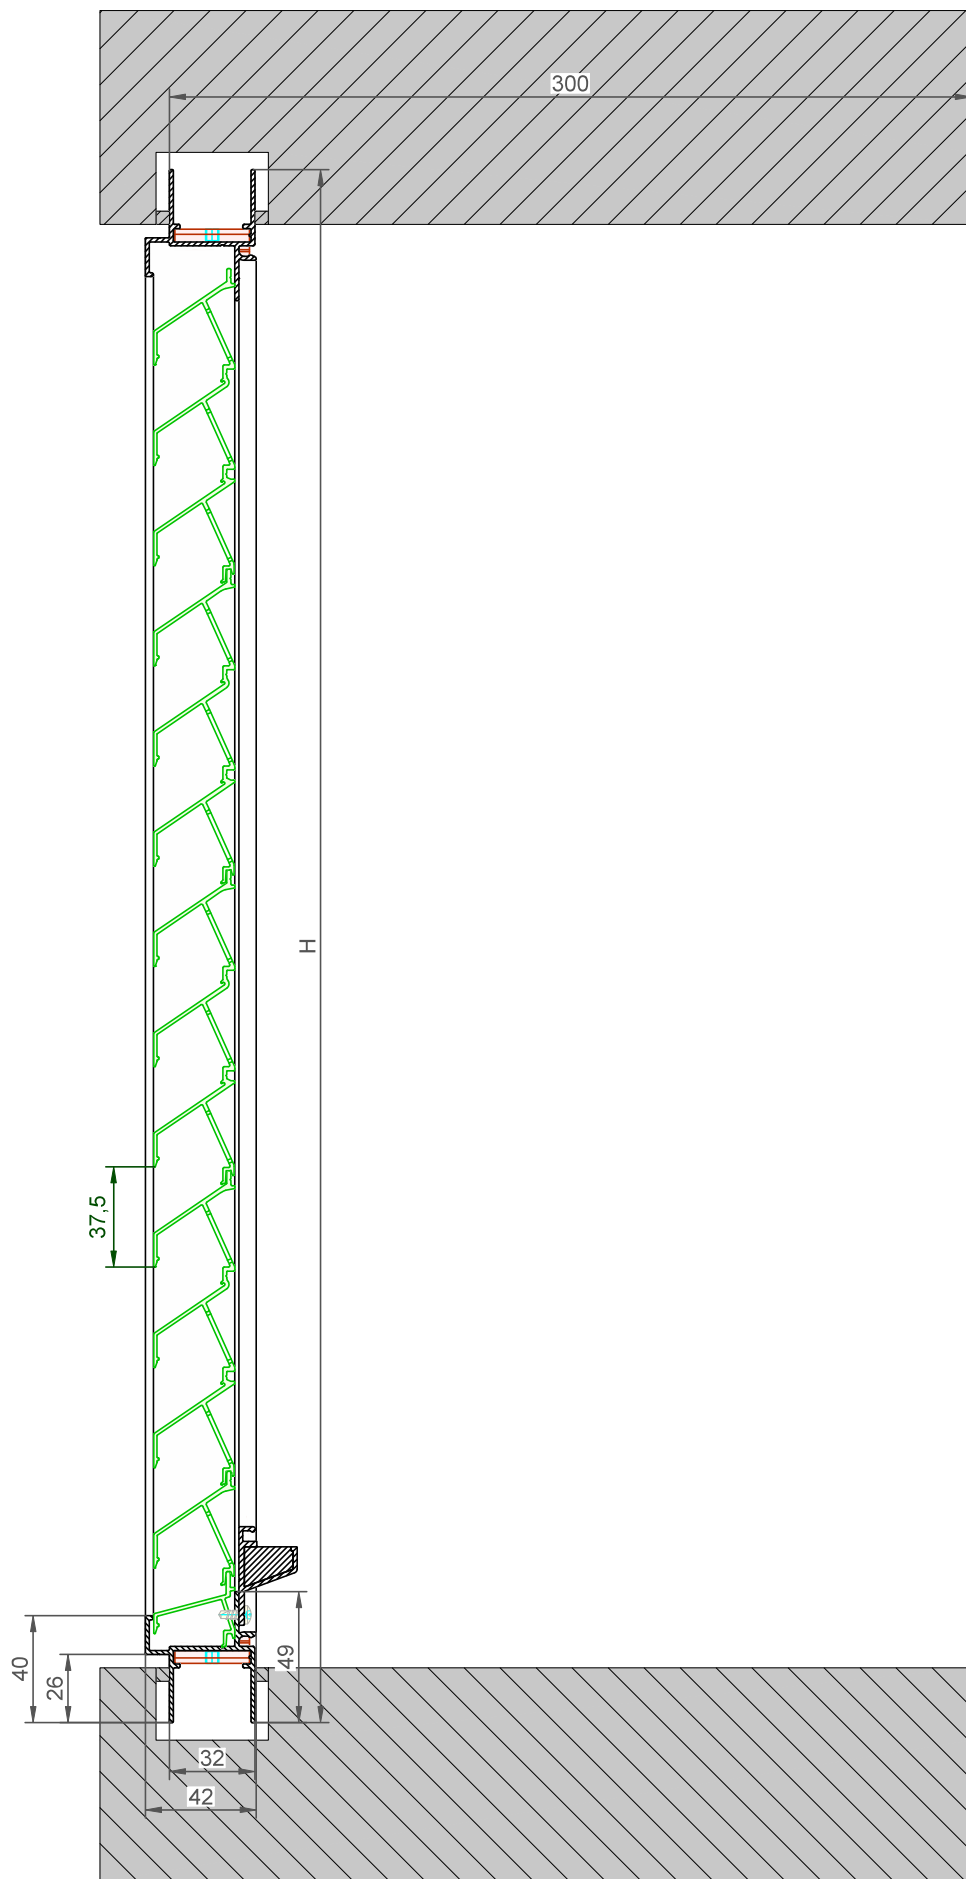
C

B

B

A

A

DucoGrille Solid **F30Z/32 - P1 + Options**

Datum : 23/03/2023

Schaal : 1:2

DUCO
Ventilation & Sun Control

Bedrijvenlaan 2 - 8630 VEURNE
tel. 0032-58/330066 - fax.0032-58/330067
email: info@duco.eu www.duco.eu
Deze tekening is eigendom van Duco Projects en mag niet gekopieerd
noch getoond worden aan derden zonder schriftelijke toestemming

Tol. : ISO 2768-mK

Getekend : SDN/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

mm

kg/m

dm²/m

DGS-F30Z-32-P1 + Options

3

2

1