

TECHNICAL DATA SHEET



Type	DucoWall Classic W 60C + options																			
DESCRIPTION	Continuous louvre wall																			
SHAPE OF BLADE	60C																			
PITCH	50 mm																			
BLADE HEIGHT	50 mm																			
BLADE DEPTH	77 mm																			
INSTALLATION DEPTH	with mullion 50/125 202 mm with mullion 50/50 127 mm with mullion 50/12 89 mm with mullion 21/50 MULTI 127 mm																			
MAX. BLADE LENGTH	6000 mm																			
MAX. SPAN	1270 mm @ 800Pa																			
STARTING DIMENSION	35 mm																			
OPTIONS	Insectmesh frame 2,3 x 2,3mm included test result situation installed in wall																			
MATERIAL	Aluminium : 3005 H18 Profile thickness : 0,8mm Thermoplastic parts : Clips Polyamide PA 6,6 -reinforced with glass fibre																			
SURFACE TREATMENT	- standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request																			
VISUAL FREE AREA	84%																			
PHYSICAL FREE AREA	46%																			
AIR FLOW DATA	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="background-color: #eee;">(EN13030)</th> <th style="background-color: #eee;">+ options</th> </tr> </thead> <tbody> <tr> <td>Ce</td> <td>0,3</td> </tr> <tr> <td>K-factor intake</td> <td>11,11</td> </tr> <tr> <td>Cd</td> <td>0,291</td> </tr> <tr> <td>K-factor exhaust</td> <td>11,81</td> </tr> </tbody> </table>		(EN13030)	+ options	Ce	0,3	K-factor intake	11,11	Cd	0,291	K-factor exhaust	11,81								
(EN13030)	+ options																			
Ce	0,3																			
K-factor intake	11,11																			
Cd	0,291																			
K-factor exhaust	11,81																			
WATER RESISTANCE	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="background-color: #eee;">(EN13030)</th> <th style="background-color: #eee;">+ options</th> </tr> </thead> <tbody> <tr> <td>v = 0 m/s</td> <td>B</td> </tr> <tr> <td>v = 0,5 m/s</td> <td>C</td> </tr> <tr> <td>v = 1 m/s</td> <td>C</td> </tr> <tr> <td>v = 1,5 m/s</td> <td>D</td> </tr> <tr> <td>v = 2 m/s</td> <td>D</td> </tr> <tr> <td>v = 2,5 m/s</td> <td>D</td> </tr> <tr> <td>v = 3 m/s</td> <td>D</td> </tr> <tr> <td>v = 3,5 m/s</td> <td>D</td> </tr> </tbody> </table>		(EN13030)	+ options	v = 0 m/s	B	v = 0,5 m/s	C	v = 1 m/s	C	v = 1,5 m/s	D	v = 2 m/s	D	v = 2,5 m/s	D	v = 3 m/s	D	v = 3,5 m/s	D
(EN13030)	+ options																			
v = 0 m/s	B																			
v = 0,5 m/s	C																			
v = 1 m/s	C																			
v = 1,5 m/s	D																			
v = 2 m/s	D																			
v = 2,5 m/s	D																			
v = 3 m/s	D																			
v = 3,5 m/s	D																			

3

2

1

D

D

C



C

B

B

A

A

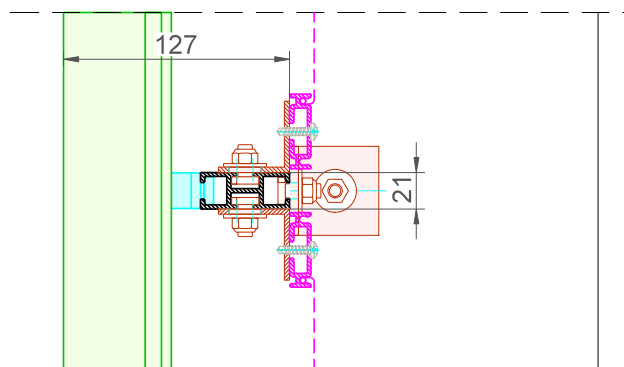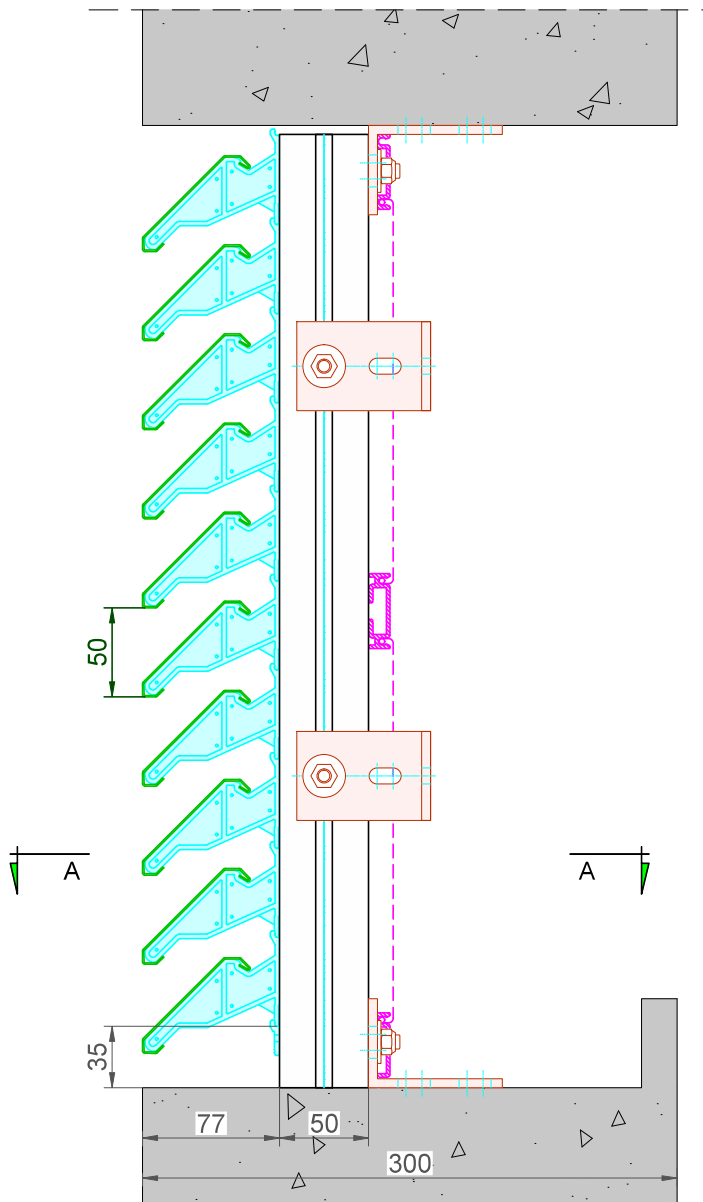

DucoWall Classic **60C + Options**

Draagprofiel 21/50 Multi

Datum : 20/02/2023

Schaal : 1:3

DUCO
Ventilation & Sun Control

Bedrijvenlaan 2 - 8630 VEURNE
 tel. 0032-58/330066 - fax.0032-58/330067
 email: info@duco.eu www.duco.eu

Deze tekening is eigendom van Duco Projects en mag niet gekopieerd
 noch getoond worden aan derden zonder schriftelijke toestemming

Tol. : ISO 2768-mK

Getekend : SVE/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

DWClassic-60C DP 21/50 Multi + Options

Zonder dorpel, geen toplamel beschikbaar

3

2

1