

TECHNICAL DATA SHEET



| Type | DucoWall Classic W 60C/3 + options | |
|--------------------|---|-----------|
| DESCRIPTION | Continuous louvre wall | |
| SHAPE OF BLADE | 60C | |
| PITCH | 50 mm | |
| BLADE HEIGHT | 50 mm | |
| BLADE DEPTH | 77 mm | |
| INSTALLATION DEPTH | with mullion 50/125 | 202 mm |
| MAX. BLADE LENGTH | 6000 mm | |
| MAX. SPAN | 1270 mm @ 800Pa | |
| STARTING DIMENSION | 34,5 mm | |
| OPTIONS | Insectmesh frame 2,3 x 2,3mm included test result situation installed in wall | |
| MATERIAL | Aluminium : 3005 H18 Profile thickness : 0,8mm Thermoplastic parts : Clips Polyamide PA 6,6 -reinforced with glass fibre | |
| SURFACE TREATMENT | - standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request | |
| VISUAL FREE AREA | 84% | |
| PHYSICAL FREE AREA | 36% | |
| AIR FLOW DATA | (EN13030) | + options |
| | Ce | 0,175 |
| | K-factor intake | 32,65 |
| | Cd | 0,151 |
| | K-factor exhaust | 43,86 |
| WATER RESISTANCE | (EN13030) | + options |
| | v = 0 m/s | A |
| | v = 0,5 m/s | A |
| | v = 1 m/s | A |
| | v = 1.5 m/s | A |
| | v = 2 m/s | A |
| | v = 2.5 m/s | C |
| | v = 3 m/s | D |
| | v = 3,5 m/s | D |

3

2

1

D

D

C



C

B

B

A

A

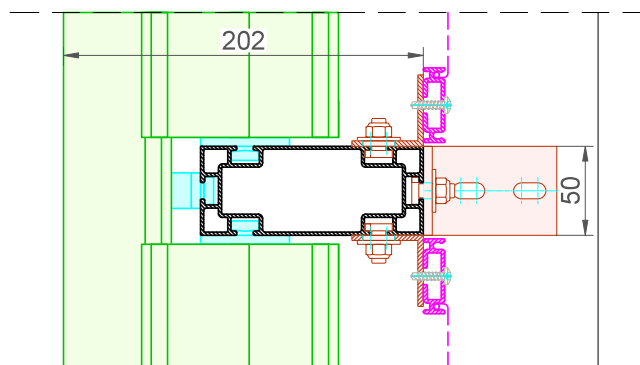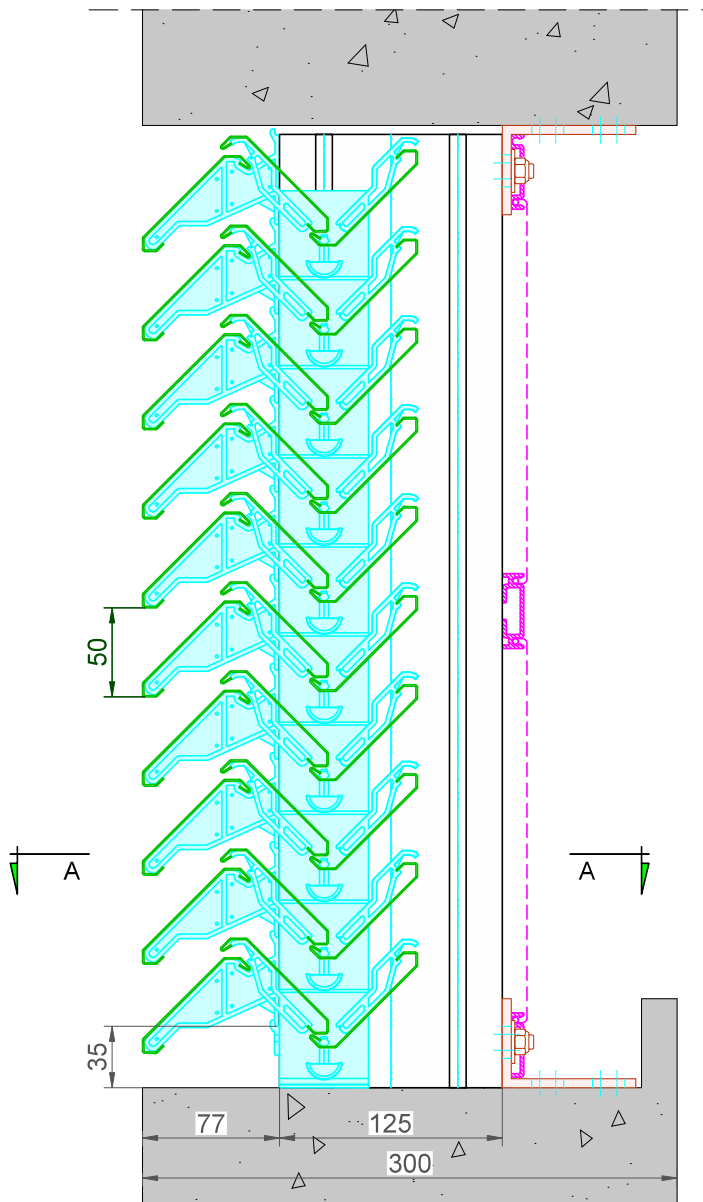

DucoWall Classic **60C/3 + Options**

Draagprofiel 50/125

Datum : 20/02/2023

Schaal : 1:3

DUCO
Ventilation & Sun Control

Bedrijvenlaan 2 - 8630 VEURNE
 tel. 0032-58/330066 - fax.0032-58/330067
 email: info@duco.eu www.duco.eu

Deze tekening is eigendom van Duco Projects en mag niet gekopieerd
 noch getoond worden aan derden zonder schriftelijke toestemming

Tol. : ISO 2768-mK

Getekend : SVE/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

DWClassic-60C/3 DP 50/125 + Options

Zonder dorpel, geen toplamel beschikbaar

3

2

1