

TECHNICAL DATA SHEET



Type	DucoWall Classic W 60C/3	
DESCRIPTION	Continuous louvre wall	
SHAPE OF BLADE	60C	
PITCH	50 mm	
BLADE HEIGHT	54 mm	
BLADE DEPTH	77 mm	
INSTALLATION DEPTH	with mullion 50/125	202 mm
	with mullion 50/50	127 mm
MAX. BLADE LENGTH	6000 mm	
MAX. SPAN	1270 mm @ 800Pa	
STARTING DIMENSION	34,5 mm	
MESH	standard without insectmesh frame	
MATERIAL	Aluminium :	3005 H18 Profile thickness : 0,8mm
	Thermoplastic parts :	Clips Polyamide PA 6,6 -reinforced with glass fibre
SURFACE TREATMENT	<ul style="list-style-type: none"> - standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request 	
VISUAL FREE AREA	84%	
PHYSICAL FREE AREA	36%	
AIR FLOW DATA	(EN13030)	standard
	Ce	0,179
	K-factor intake	31,21
	Cd	0,153
	K-factor exhaust	42,72
WATER RESISTANCE	(EN13030)	standard
	v = 0 m/s	A
	v = 0,5 m/s	A
	v = 1 m/s	A
	v = 1.5 m/s	A
	v = 2 m/s	A
	v = 2.5 m/s	C
	v = 3 m/s	D
	v = 3,5 m/s	D

3

2

1

D

D

C



C

B

B

A

A

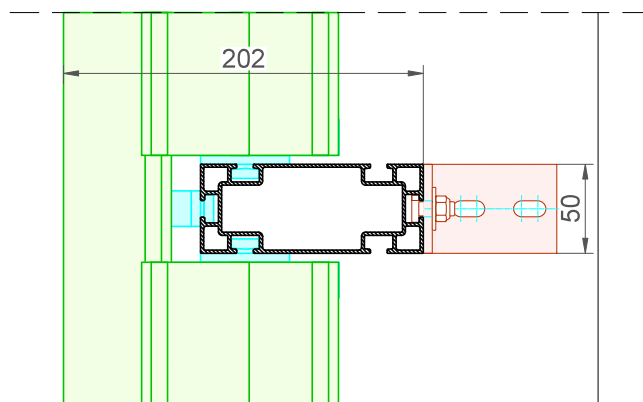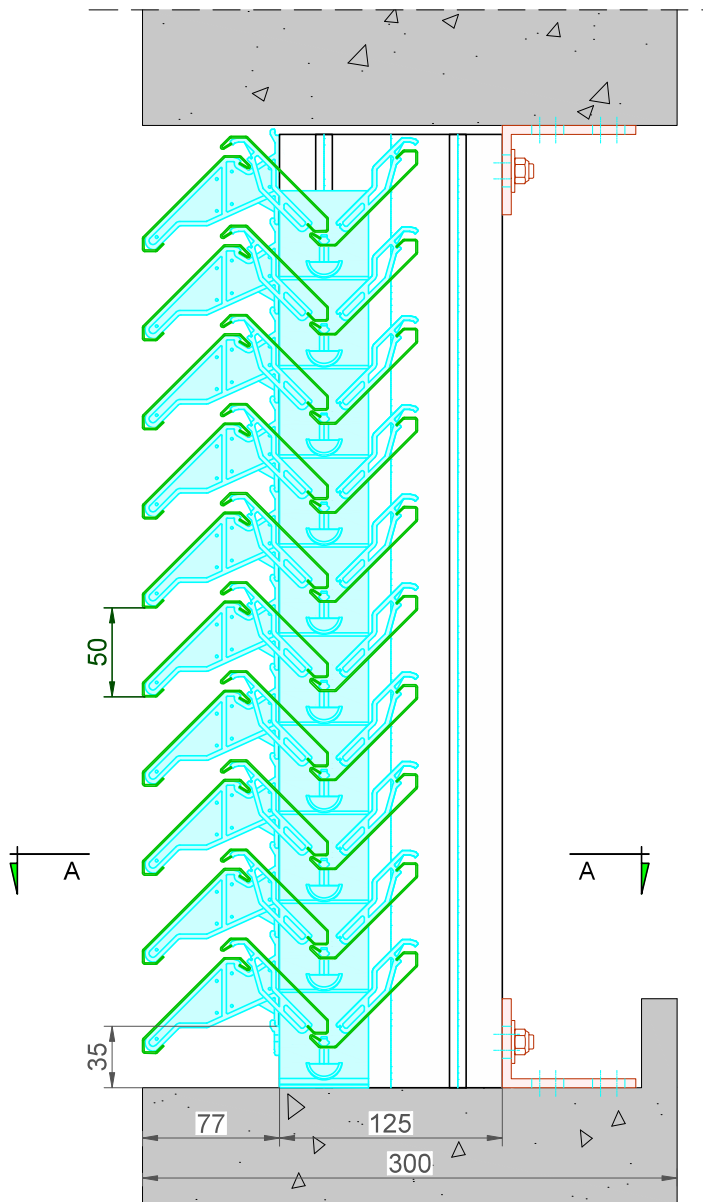

DucoWall Classic **60C/3** Draagprofiel 50/125

Datum : 20/02/2023

Schaal : 1:3

DUCO
Ventilation & Sun Control

Tol. : ISO 2768-mK

Getekend : SVE/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

Bedrijvenlaan 2 - 8630 VEURNE
 tel. 0032-58/330066 - fax.0032-58/330067
 email: info@duco.eu www.duco.eu
 Deze tekening is eigendom van Duco Projects en mag niet gekopieerd
 noch getoond worden aan derden zonder schriftelijke toestemming

DWClassic-60C/3 DP 50/125

Zonder dorpel, geen toplamel beschikbaar

3

2

1