

# TECHNICAL DATA SHEET



Type	DucoWall Classic W 70V	
DESCRIPTION	Continuous louvre wall	
SHAPE OF BLADE	70V	
PITCH	65 mm	
BLADE HEIGHT	71 mm	
BLADE DEPTH	75 mm	
INSTALLATION DEPTH	with mullion 50/125                              200 mm with mullion 50/50                                125 mm with mullion 50/12                                87 mm with mullion 21/50 MULTI                        125 mm	
MAX. BLADE LENGTH	6000 mm	
MAX. SPAN	2160 mm @ 800Pa	
STARTING DIMENSION	24 mm	
MESH	standard without insectmesh frame	
MATERIAL	Aluminium :                              EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5mm Thermoplastic parts :                    Clips Polyamide PA 6,6 -reinforced with glass fibre	
SURFACE TREATMENT	- standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request	
VISUAL FREE AREA	65%	
PHYSICAL FREE AREA	44%	
AIR FLOW DATA	(EN13030)	standard
	Ce	0,117
	K-factor intake	73,05
	Cd	0,109
	K-factor exhaust	84,17
WATER RESISTANCE	(EN13030)	standard
	v = 0 m/s	B
	v = 0,5 m/s	B
	v = 1 m/s	B
	v = 1.5 m/s	C
	v = 2 m/s	D
	v = 2.5 m/s	D
	v = 3 m/s	D
v = 3,5 m/s	D	

3

2

1

D

D

C



C

B

B

A

A

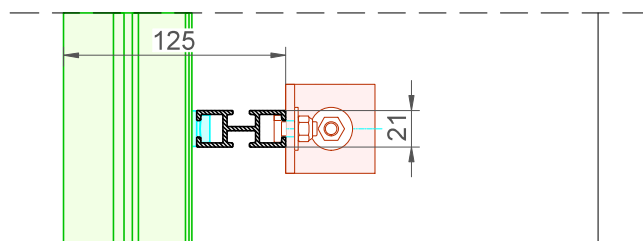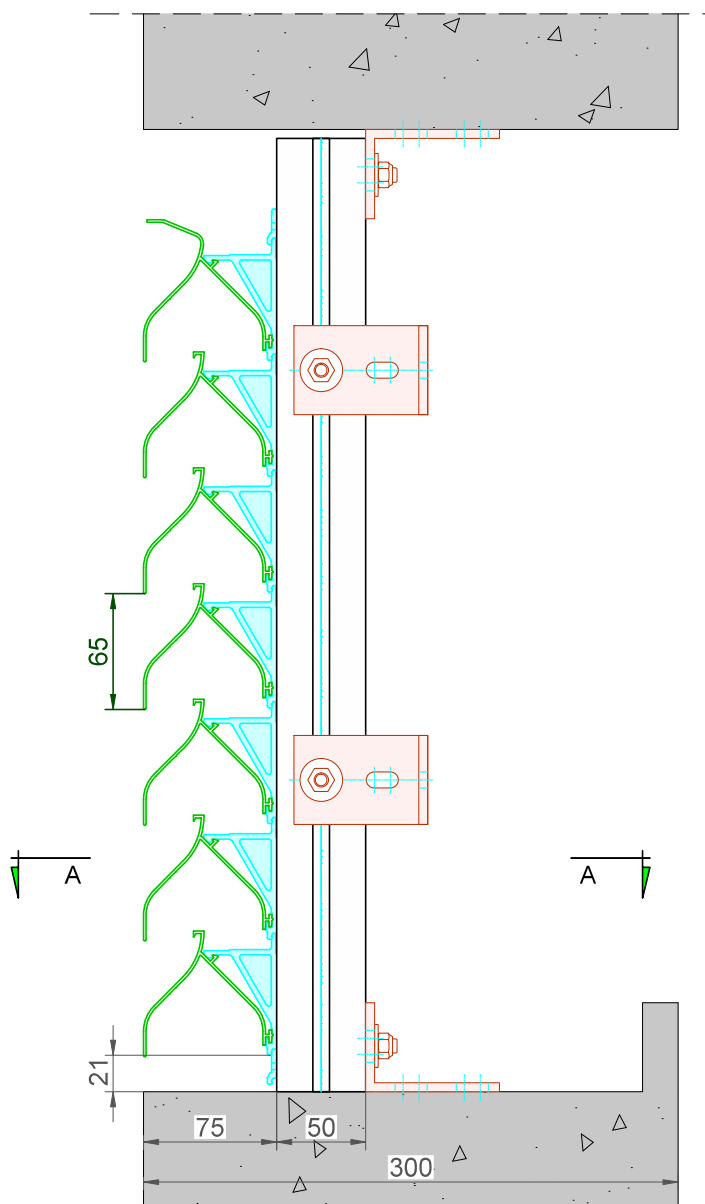

DucoWall Classic **70V** Draagprofiel 21/50 Multi

Datum : 20/02/2023

Schaal : 1:3

**DUCO**  
Ventilation & Sun Control

Bedrijvenlaan 2 - 8630 VEURNE  
tel. 0032-58/330066 - fax.0032-58/330067  
email: info@duco.eu www.duco.eu

Deze tekening is eigendom van Duco Projects en mag niet gekopieerd  
noch getoond worden aan derden zonder schriftelijke toestemming

Tol. : ISO 2768-mK

Getekend : SVE/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

mm

kg/m

dm²/m

DWClassic-70V DP 21/50 Multi

Zonder dorpel, met toplamel

3

2

1