

# TECHNICAL DATA SHEET

version 05/09/2016



| TYPE                  | DUCODOOR LOUVRE Double Outward-opening  |
|-----------------------|---|
| DESCRIPTION           | DucoDoor Louvre is a ventilated louvre door or false louvre door in a continuous louvre wall system with specific requirements for intrusion resistance and/or draught-proofing.  |
| LOUVRE TYPE           | Almost the entire DucoWall range is available as surface-mounted louvresOptional in door leaf: DucoGrille Solid 30Z, punched (P1 or P2) or non-punched (NP)   |
| INTRUSION RESISTANCE  | Choice of configurations: intrusion-resistant RC2 (complies with standard EN 1627:2011 & NEN5096+C2:2011) with DucoGrille Solid 30ZNP or 30Z P1 in all cases, or non-intrusion-resistant  |
| DOOR FRAME            | Door frame section with mitre angle joints and fitted with rubber gasketPartial door frame (= made to drawing) or full door frame: if partial, the bottom door frame section is replaced by a 60x5 mm flat section (can be removed after fitting)   |
| DOOR LEAF             | Door frame section with mitre angle joints and provided on the inside with groove in which the DucoGrille Solid 30Z louvres can be fitted. This double door can be symmetrical or asymmetrical: in a symmetrical double door both door leaves are the same width.   |
| HEIGHT                | <p>Door frame height: - intrusion resistant: 2050 mm minimum to 2900 mm maximum- non-intrusion resistant: 1500 mm minimum to 2900 mm maximum</p> <p>Effective height: - partial frame: height of door frame - 67 mm- full frame: height of door frame - 135 mm</p> <p>Height of door leaf: - partial frame: height of door frame - 63 mm- full frame: height of door frame - 108 mm</p> |
| WIDTH                 | <p>Door frame width: from 1420 mm minimum (depending on surface-mounted louvre)maximum 3100 mm</p> <p>Effective width: door frame width - 135 mm</p> <p>Single door leaf width: <math>\frac{1}{2}</math> (door frame width - 108 - 9) mmIf symmetrical double door</p>  |
| HINGES                | Stainless steel hinges, equipped with security pins in RC2 configuration3 off per door leaf if door leaf height >2300 mm or door leaf width >1250 mm, otherwise 2 offAllow opening angle up to 180°   |
| TENSION CABLE         | Diagonal stainless steel tension cable fitted on the inside of the door whenever 3 hinges are required  |
| LOCK HEIGHT           | Standard height 1064 mm and can be altered in steps of one louvre   |
| LOCK                  | Cylinder lock (with 3 keys)Multipoint locking for doors higher than 2.3 m and/or intrusion-resistant configuration  |
| HAND PROTECTION       | Lock plate on lock side of doorLock cover plate opposite lock plate   |
| DOOR FRAME FIXING     | - external dowels- internal dowels- mitre angle joints  |
| DOOR FURNITURE        | L-shaped or round handle on the inside and outside for non-intrusion-resistant doors. Combinations with a fixed handle for intrusion-resistant doors.   |
| VISUAL FREE PASSAGE   | Depending on the surface-mounted louvre chosen and whether or not the DucoGrille Solid 30Z louvre is present in the door leaf   |
| PHYSICAL FREE PASSAGE | Depending on the surface-mounted louvre chosen and whether or not the DucoGrille Solid 30Z louvre is present in the door leaf   |
| MATERIAL              | <p>Aluminium: Al Mg Si 0.5</p> <p>Louvre holders: Polyamide PA 6.6 - fibreglass reinforced</p> <p>Rubber gasket: TPE</p>  |
| DOOR LIMITER          | Door limiter is standard  |
| SURFACE TREATMENT     | Anodising compliant with QUALANODEEnamelled polyester powder coating compliant with QUALICOAT   |
| OPTIONS               | <p>Stainless steel exclusion mesh: 2.3x2.3 mm against insects, 6x6 mm, 10x10 mm or 20x20 mm against vermin</p> <p>Multipoint locking for door heights &lt;2300 mm if non-RC2 configuration</p> <p>Door closer (pump)</p> <p>SS door fixing pin</p> <p>Fixed alu cover front plate</p> <p>Mupan insulation 30mm (incl. full alu back plate)</p>  |

## K factor

|         |                                |
|---------|--------------------------------|
| Intake: | pending on surface-mounted lou |
| Outlet: | pending on surface-mounted lou |

T\_N\_DDL\_DBu

# TECHNICAL DATA SHEET


version 05/09/2016

**DUCO**  
Ventilation & Sun Control

TYPE:

**DUCODOOR LOUVRE Double Outward-opening**

Type depicted: Right-hand and symmetrical version

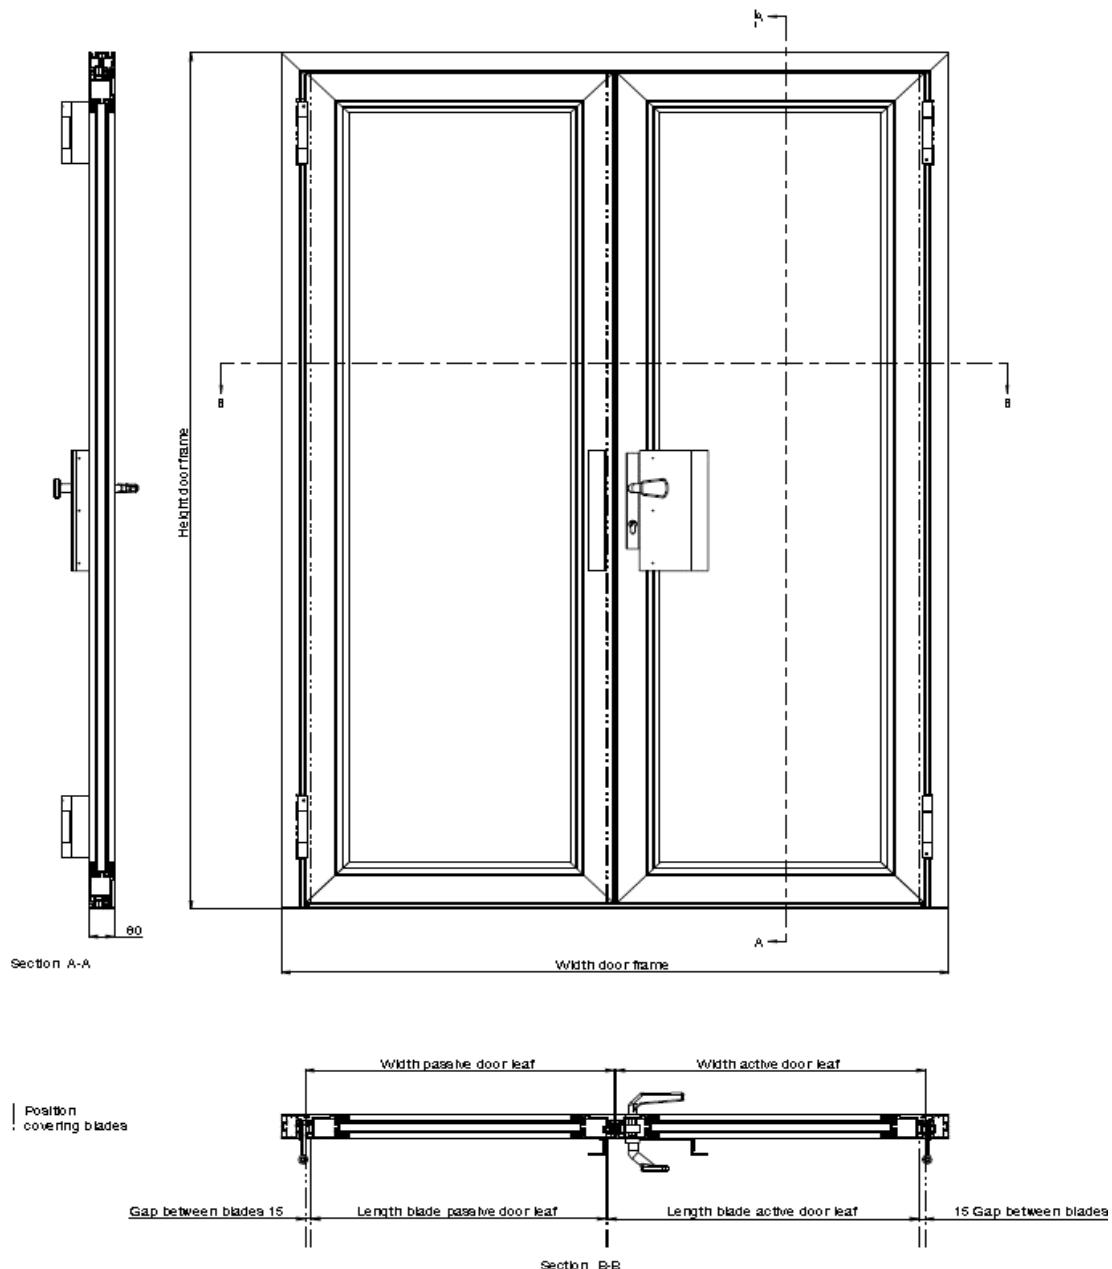

| English                                    | Nederlands                                   |
|--|--|
| DucoDoor Louvre double right hand outswing | DucoDoor Louvre dubbel buitendraaiend rechts |
| Section                                    | Doorsnede                                    |
| Position covering blades                   | Positie opbouwlamellen                       |
| Height door frame                          | Hoogte deurkozijn                            |
| Width door frame                           | Breedte deurkozijn                           |
| Width active door leaf                     | Breedte actief deurblad                      |
| Width passive door leaf                    | Breedte passief deurblad                     |
| Length blade active door leaf              | Lengte lamel actief deurblad                 |
| Length blade passive door leaf             | Lengte lamel passief deurblad                |
| Gap between blades                         | Tussenruimte lamellen                        |