


TECHNICAL DATA SHEET

TYPE	DUCOSTRIP				
DESCRIPTION	Slot ventilator, suitable for use with aluminium, PVC or timber windows.				
SELF-REGULATING	No				
EQUIVALENT AREA	Slimline : 2605 mm ² /m @ 1 Pa Wideline : 5283 mm ² /m @ 1 Pa				
GEOM. FREE AREA	Slimline : 3000 mm ² /m Wideline : 6500 mm ² /m				
AIRFLOW	Slimline : 10,4 m ³ /h/m @ 2 Pa Wideline : 20,9 m ³ /h/m @ 2Pa				
SOUND REDUCTION	Slimline : 32 (-1;0) dB Dne,W (C;Ctr) in open position Wideline : 28 (0;1) dB Dne,W (C;Ctr) in open position				
OCTAVE BAND VALUES	at 125 Hz	at 250 Hz	at 500 Hz	at 1000 Hz	at 2000 Hz
Slimline	32 dB	41,1 dB	37,0 dB	32,7 dB	29,7 dB
Wideline	31,3 dB	36,5 dB	32,7 dB	27,7 dB	27 dB
WIND TIGHTNESS	Class 2 (300 Pa) in closed position				
WATER TIGHTNESS	Class 5A (200 Pa) in closed position				
CONTROL OPTIONS	Manual				
MATERIAL	Aluminium : AlMg Si 0.5 Plastic parts : ASA or ABS				
SURFACE TREATMENT	- DAR (Duco Anodic Ral) - Polyester powder coated (60-80µm) in Duco300RAL - Specific RAL colour and/or texture on demand				

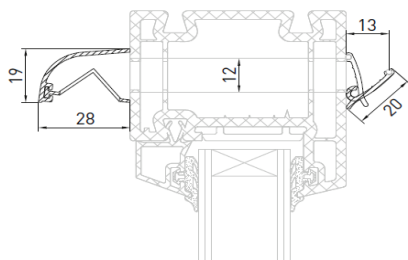

THROUGH-THE-FRAME SLOT VENTILATOR		
Type	Vent length in mm	Slot height in mm
Slimline	290	12
Wideline	460	16