


TECHNICAL DATA SHEET

DucoBox Silent

The DucoBox Silent is a compact, durable and extremely energy-efficient central extract unit, developed for use within DUCO's demand-controlled ventilation systems and extracts the moist and/or polluted air when necessary and in the right quantity.

The DucoBox Silent uses just one PCB for both control and operating electronic systems. Simple design and an efficient DC motor ensure long service life.

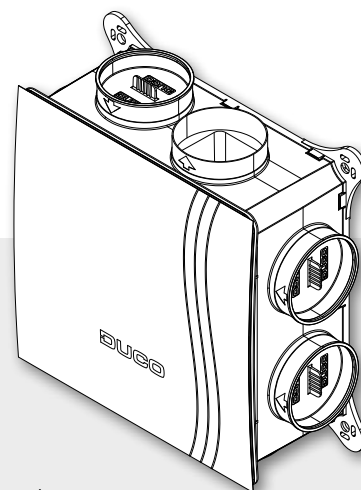

Physical characteristics

Item number	0000-4215 (plug type F) 0000-4225 (Perilex plug, only in the Netherlands)
Optional accessories	0000-4182 (Silent Plus Kit)
Extraction capacity at 150 Pa	400 m³/h
Width x Height x Depth (mm)	480 x 480 x 194
Weight	4,3 kg
Colours	Green with white cover
Communication	Duco RF Perilex Boxsensor CO ₂ Humidity Box Sensor
Power cable length	1,5 m (approximately 1 m on the outside of the DucoBox)

Electrical characteristics

Unom	230 VAC – 50 Hz	Inom	0.65 A
Pmax	84 W	Cos	0,55
IP class	IP42		

