TECHNICAL DATA SHEET DucoVent Premium


(by Prado)

The DucoVent Premium is by far the finest vent in the market that can be used for both supply and extraction. A 'trimless' integration into the plasterwork makes the vent almost invisible. The well-thought-out design ensures a diffuse air supply via the Coanda effect and therefore guarantees optimum comfort. Aesthetics and quality in one product! A perfect combination with DUCO's high-quality ventilation solutions!

Specifications

Item number:	0000-4903
Dimensions (mm):	Vent: Ø∘⊖≥ x 74 Plaster ring: Ø190 X 74
Build-up height:	0 mm (recessed without visible edges)
Maintenance:	Easy to clean
Scope:	Ventilation ducts (extraction and supply) with diameter $\varnothing125$
Connection:	Ø125
Sealing ring:	Rubber mounting ring (on plaster ring)
Mounting:	Suitable for ceiling and wall Min. 35 cm from the wall To be plastered in (plaster ring)
Maximum flow rate supply:	50 m³/h
Maximum flow rate extraction:	50 m³/h
Calibration:	32 adjustment positions
Material:	Plastic
Colour:	White (visible parts can be painted over if synthetic primer is used)
Weight:	280 g
Packaging:	Per piece

DucoVent Premium supply air

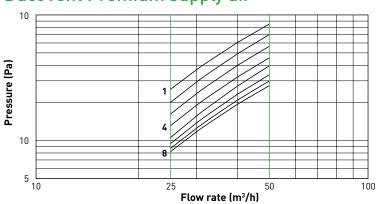

DucoVent Premium extract air

